


911 address shall be a minimum 3" lettering marked on meter enclosure, pole, or durable material attached to pole and should be visible from street. (See sections 1-3, 3, 4)

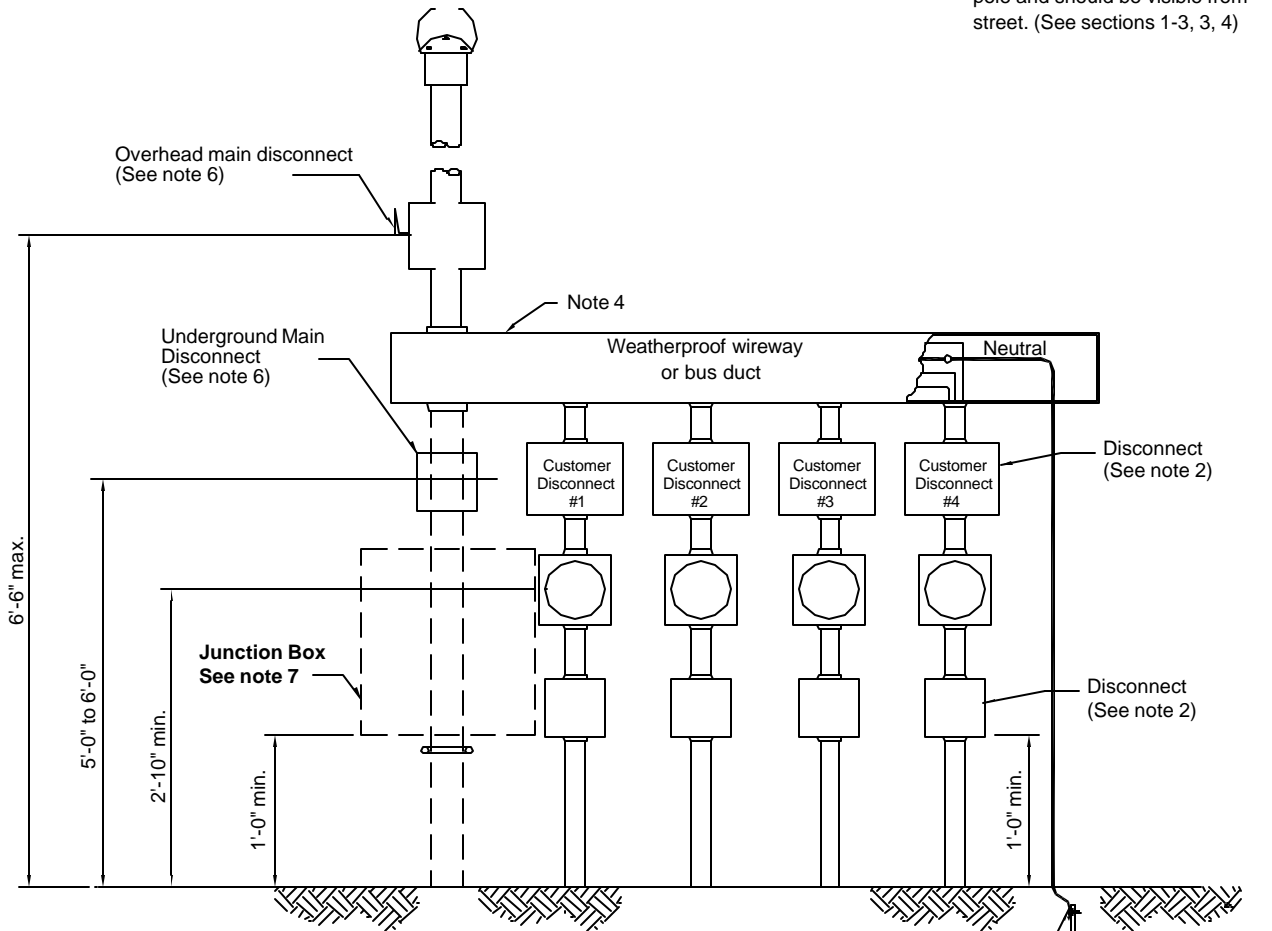

**Notes:**

1. Customer facilities shall comply with Company Standards, the National Electrical Code, and authorities having jurisdiction.
2. The Customer shall furnish and install a disconnect switch on the supply side of the meter enclosure. If this disconnect does not provide overcurrent protection, a separate overcurrent device shall be installed immediately adjacent thereto in accordance with National Electrical Code article 230.91.
3. For identification purposes all disconnects and meter enclosures will be permanently and plainly marked to designate the particular apartment or office served.
4. This installation applies to two (2) or more meters at one location.
5. This installation can be adapted for underground or overhead service.
6. A main disconnect is required for seven or more disconnects -(National Electrical Code article 230.71(a)). A main disconnect is recommended in all cases for isolation of this disconnect/meter group from any other groups served by the same transformer. Utility connection shall be made on the line side of main disconnect or junction box.
7. When the Customer provides, owns, installs, and maintains the secondary wire to the Company's transformer, a junction box is not required. Consult the Company.
8. When installed as an underground service, the Customer shall install 80lb non-metallic (manila or grass) pull line or bull tape in the conduit.
9. Equipment to be installed at a location designated by the Company.
10. If a current transformer (CT) installation is required, see SS11.8-3
11. See section 8.7.1 for junction box sizing and Customer supplied connectors.

Upper end of ground rod to be flush with or below grade.  
5/8" X 8'-0" copperclad ground rod and clamp

**Call 48 Hours Before You Dig  
1-888-258-0808**

In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

ENTERGY SERVICES, INC.	
<b>CUSTOMER OWNED MULTIPLE METER 3Ø 277WYE/480DELTA VOLT SELF CONTAINED METER ARRANGEMENT</b>	
APPROVED BY: JDS	DATE: April 1998
CHECKED BY: LKE	SCALE: NONE
DRAWN BY: WINK-AJC	
No. SS11.6-5	
PLOT 1=1 SH. 1 OF 1	

5	3/08	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
4	4/05	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
3	4/02	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
2	5/99	UPDATED PER SERVICE STANDARDS TEAM	TKV	
1	6/98	UPDATED PER SOLUTION GROUP RECOMMENDATIONS	MCC	
NO.	DATE:	REVISION	BY:	APPR: