


911 address shall be 3" lettering marked on pole or on durable material attached to pole.

Maximum Recommended Distance	
Amps	Length
100	100'
200	75'
320	40'

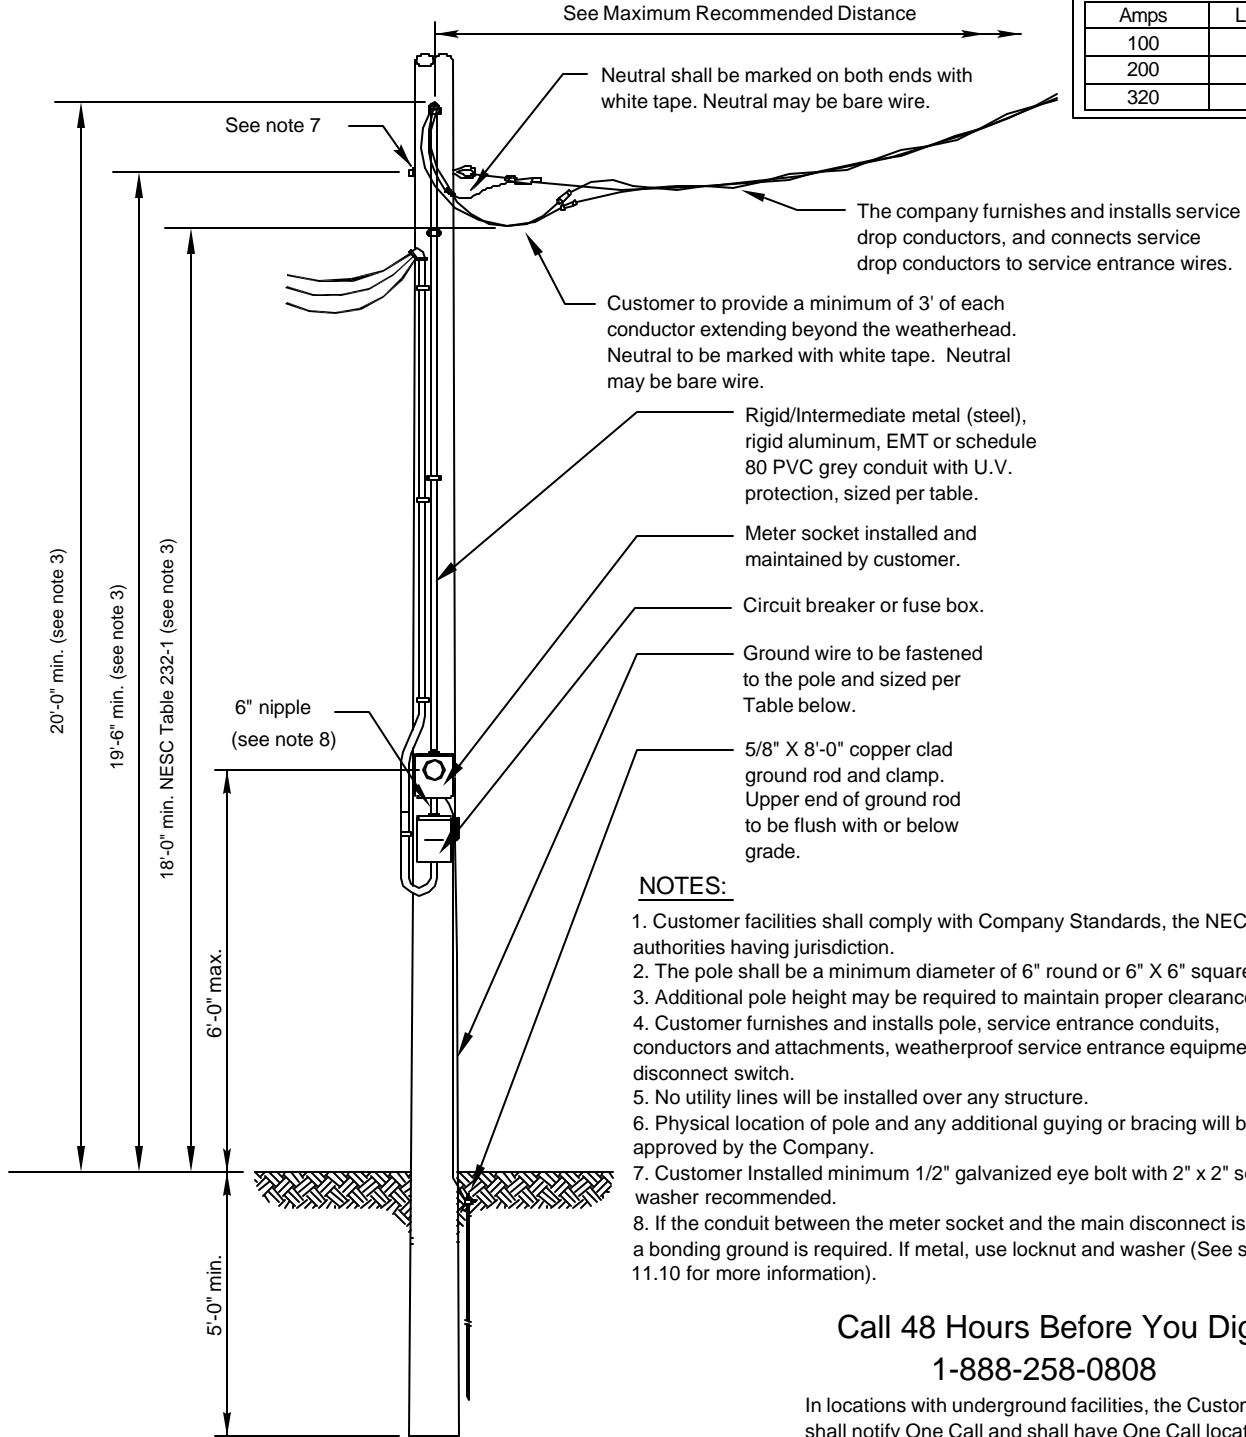

NOTES:

1. Customer facilities shall comply with Company Standards, the NEC, and authorities having jurisdiction.
2. The pole shall be a minimum diameter of 6" round or 6" X 6" square.
3. Additional pole height may be required to maintain proper clearance.
4. Customer furnishes and installs pole, service entrance conduits, conductors and attachments, weatherproof service entrance equipment, and disconnect switch.
5. No utility lines will be installed over any structure.
6. Physical location of pole and any additional guying or bracing will be approved by the Company.
7. Customer Installed minimum 1/2" galvanized eye bolt with 2" x 2" square washer recommended.
8. If the conduit between the meter socket and the main disconnect is PVC, a bonding ground is required. If metal, use locknut and washer (See section 11.10 for more information).

**Call 48 Hours Before You Dig
1-888-258-0808**


In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

CUSTOMER INSTALLATION MINIMUM WIRING SIZE FOR SINGLE FAMILY DWELLING


METER SIZE	CONDUIT SIZE	ALUMINUM (INSULATION PER NEC)	COPPER (INSULATION PER NEC)	NEUTRAL WIRE SIZE	GROUND WIRE SIZE
100 Amp	1.5"	#2	#4	same as phase	#6 Cu
200 Amp	2"	4/0	2/0	same as phase	#4 Cu
320 Amp	3"	500 kcm	350 kcm	see NEC	#2 Cu

4	3/08	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
3	4/02	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
2	5/99	UPDATED PER SERVICE STANDARDS TEAM	TKV	
1	6/98	UPDATED PER SOLUTION GROUP RECOMMENDATIONS	MCC	
NO.	DATE:	REVISION	BY:	APPR:


ENTERGY SERVICES, INC.	
TYPICAL INSTALLATION - CENTRAL SERVICE POLE (FARMS & MULTIPLE SERVICE DROPS)	
APPROVED BY: JDS	DATE: April 1998
CHECKED BY: LKE	SCALE: NONE
DRAWN BY: WINK-AJC	
No. SS4.8-1	
Entergy	
PLOT 1=1	SH. 1 OF 1

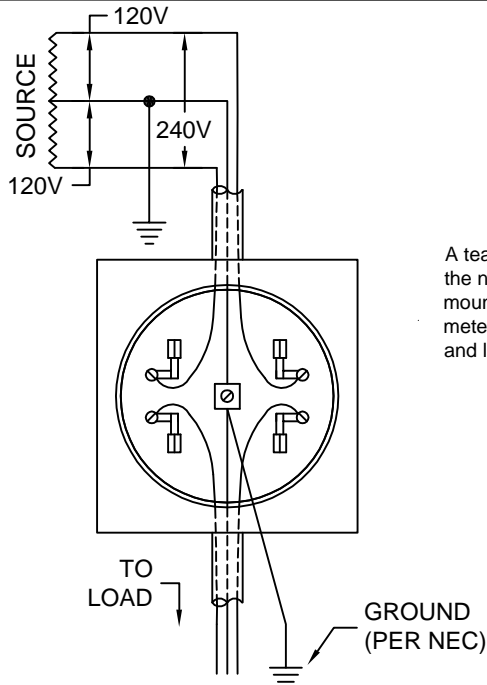


TYPE S DETACHABLE
3 WIRE SINGLE PHASE 120/240 VOLTS

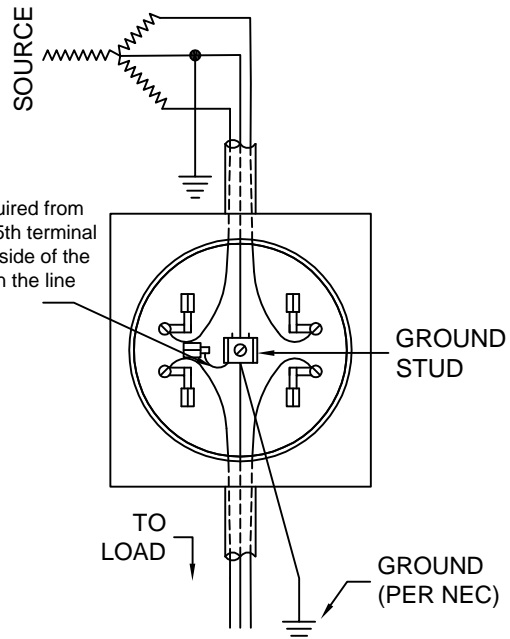

TYPE S DETACHABLE
3 WIRE SINGLE PHASE 120/208 WYE VOLTS

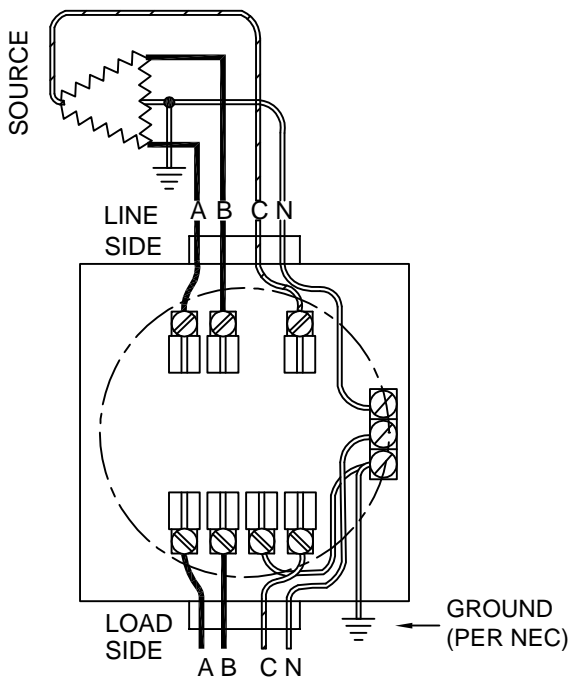

THREE PHASE 4 WIRE DELTA
120 / 240 VOLTS

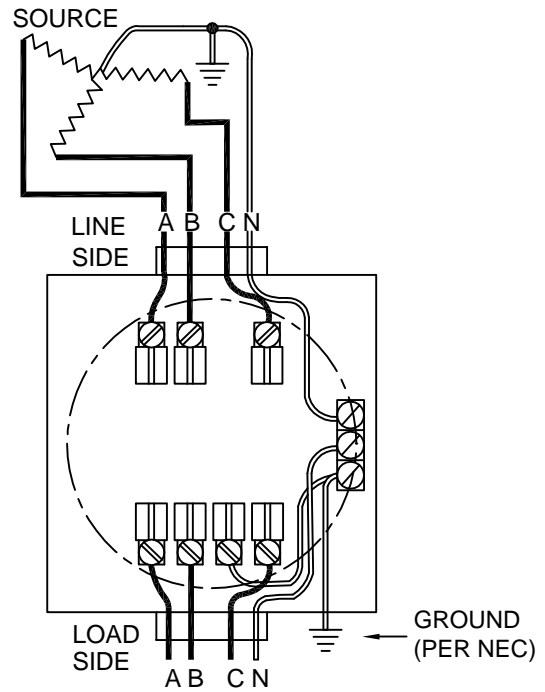

THREE PHASE 4 WIRE WYE
120 / 208 or 277/480 VOLTS

NOTES:


1. Ungrounded Conductor with the Higher Voltage to Ground (Phase marked C) must be marked orange (NEC 110.15 & 230.56).
2. All sockets, except residential single phase less than 320 Amps, shall have a manual mechanical gang operated bypass switch.
3. Load and supply wires shall not cross in the meter socket (11.1.2.7)

ENTERGY SERVICES, INC.	
WIRING DIAGRAM CONNECTIONS FOR OVERHEAD SELF CONTAINED METERS	
APPROVED BY: JDS	DATE: JUNE 1999
CHECKED BY: LKE	SCALE: NONE
DRAWN BY: CMS	
No. SS11.8-1	
PLOT 1=1	SH. 1 OF 2


2	3/08	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
1	4/02	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
NO.	DATE:	REVISION	BY:	APPR:



UNDERGROUND

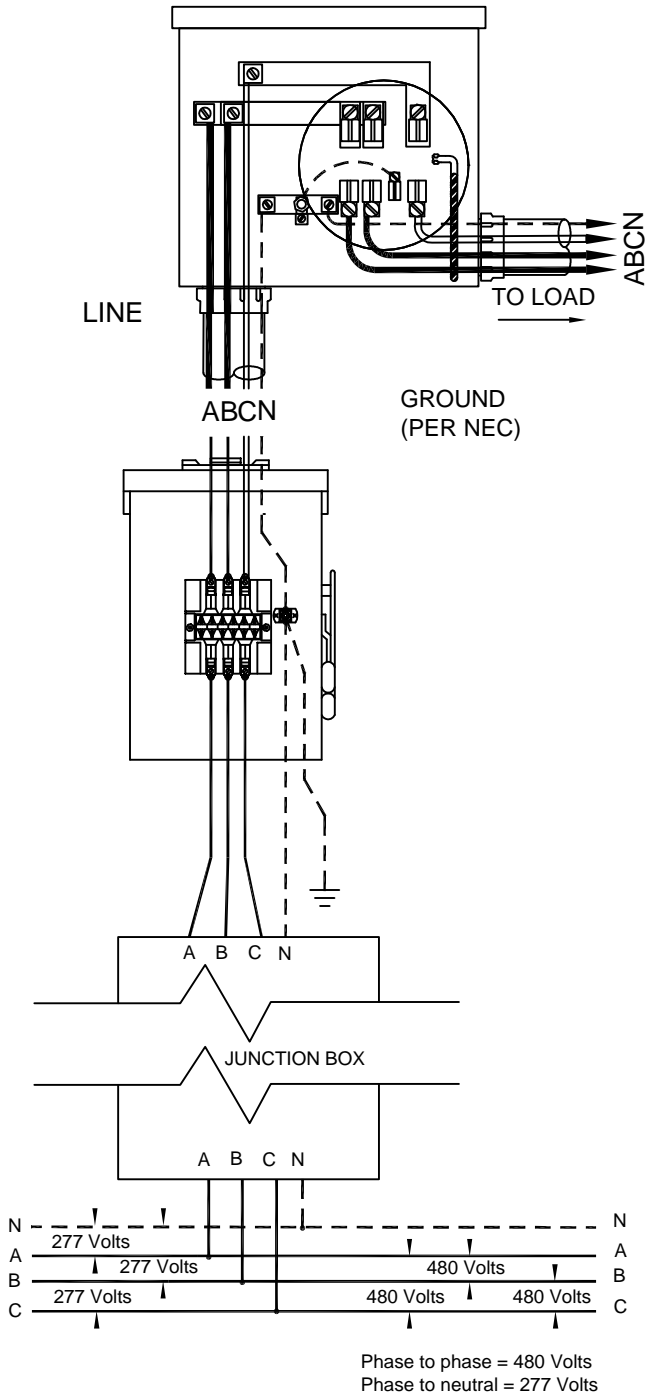

OVERHEAD

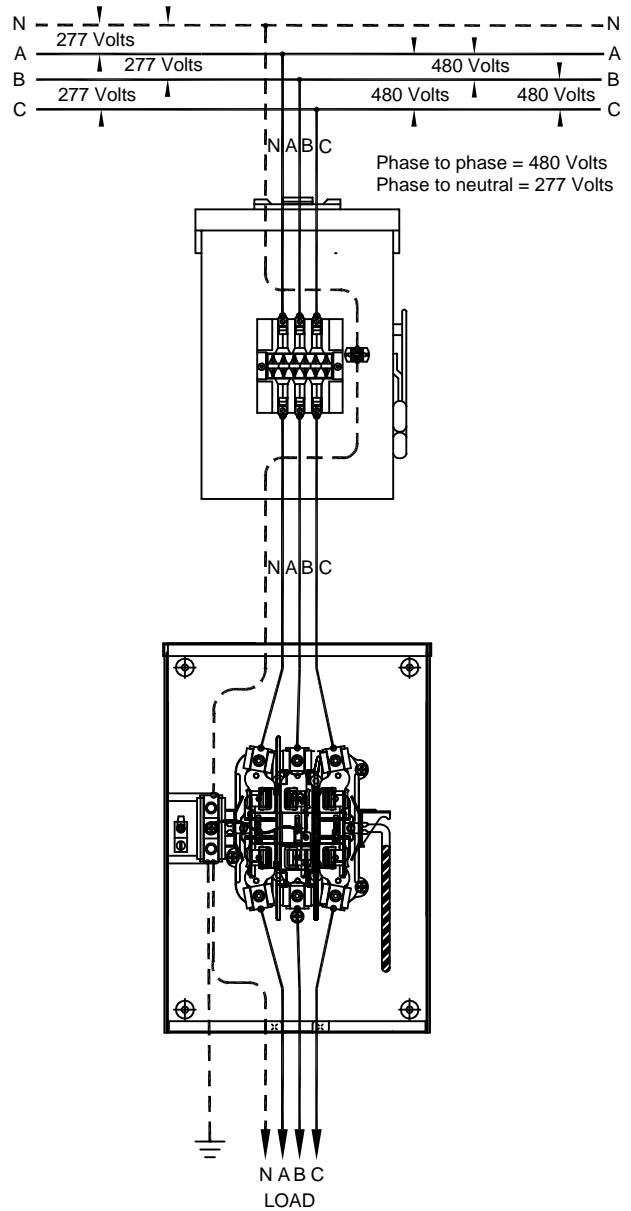

NOTES:

1. A junction box may not be required for this underground service (see section 8.7.1)
2. See section 8.7.1 for junction box sizing and Customer supplied connectors.
3. Specific 480 volt applications involving ballparks, oil fields, and irrigation pumps require a disconnect ahead of the meter and an overcurrent device on the load side of the meter.

ENTERGY SERVICES, INC.

TYPICAL 3Ø 4 WIRE 277/480 INSTALLATION

APPROVED BY: JRH	DATE: 04-29-05
CHECKED BY: EJH	SCALE: NONE
DRAWN BY: DAT	CEA NO. 00000



No. SS11.8-5

PLOT 1=1 SH. 1 OF 1

1	3/08	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
NO.	DATE:	REVISION	BY:	APPR: